

CAPACITOR CONSTRUCTION TYPE: FEC/HV/WF 15kV


These capacitors are constructed with polyester dielectrics and aluminium electrodes.

Wrapped with polyester tape, end filled with epoxy resin, fitted with a PVC sleeve.



Capacitor Specifications

Capacitance	See Chart
Capacitance Tolerance	5%, 10%, 20%
Rated Voltage	15kV DC
Temperature Range	-25°C to +85°C
Power Factor	0.01 @ 1K Hz
Termination	0.8 mm T.C.W
Voltage Rise Time	> 500 v/us
Temp Coefficient	400 p.p.m /°C
Test Voltage	1.25 x Working Voltage

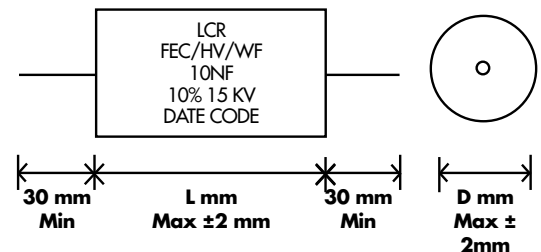

Value	Length (mm)	Diameter (mm)
Up to 5NF	45	19
5.1nF - 10nF	45	26
10.1nF - 25nF	55	32.5
25.1nF - 35nF	70	32
35.1nF - 47nF	70	37
47.1nF - 68nF	70	44.5