

The unique format of these small filters has enabled users the ability to take full advantage of the performance, wide current range and compact size.

Applications as diverse as fruit machines and military equipment are prime examples where both protection and suppression are needed.



The PCB mounted version can accommodate various 'pin-outs'.



## SPECIFICATION

Rated Voltage	15 - 250V
Leakage Current	0.25 mA (max)
Operating Temperature	-25°C to +85°C
Approvals	BS, EN, ISO 9001-2008

Part No	C 'X' $\mu$ F	C 'Y' pF	L mH	Current
FP023	0.1	2500	6	1
FP024	0.1	2500	2	2
FP025	0.1	2500	1	4

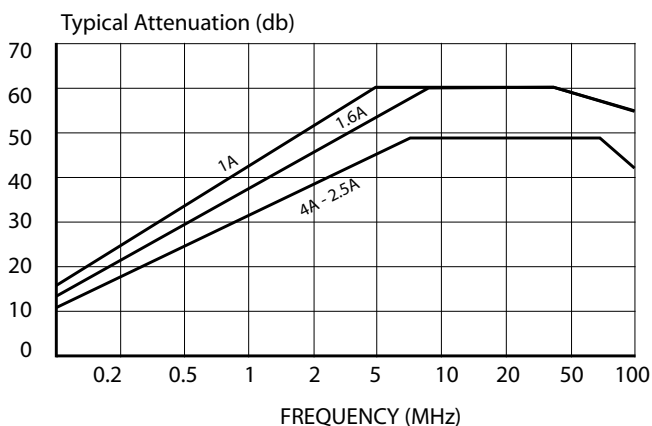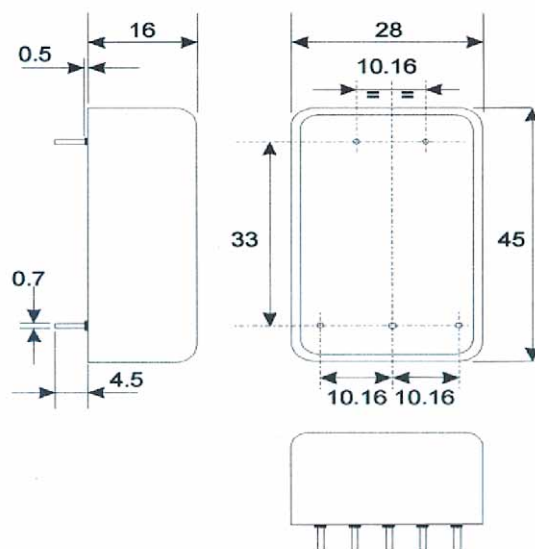

## Circuit Diagram

