
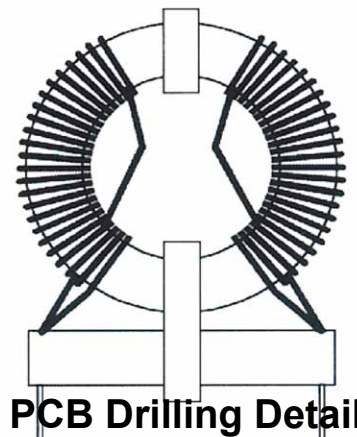


These Open Former Common Mode Suppression Chokes, are specifically designed to attenuate mains borne RF interference.

Constructed using a double wound ferrite ring mounted vertically onto a flame retardant plastic carrier.

High Attenuation to unwanted RFI can be achieved by the addition of X2 and Y capacitors.

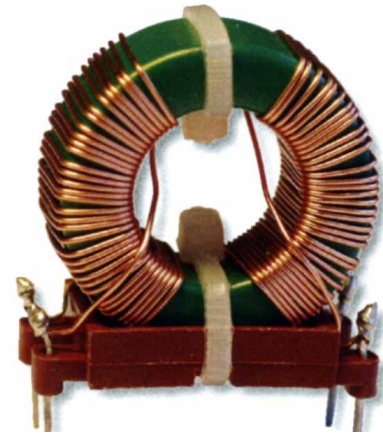

SPECIFICATION

Voltage Rating	250 VAC
Live Frequency	50 / 60Hz
Inductance Tolerance	± 20 %
Test Voltage Winding to Winding	2.5 kV A.C
Temperature Range	-25°C to +85°C
Temperature Rise @ Rated Current	30°C
Approvals	BS, EN, ISO 9001-2008

Part No	Amp	Inductance	D.C Resistance (mΩ)
CF1	1	18 mH	640
CF2	2	7.5 mH	160
CF3	3	3.2 mH	71
CF4	4	2.4 mH	40
CF5	6	1.4 mH	19
CF6	8	0.9 mH	9.6

