


These capacitors are constructed with polypropylene film which offers excellent properties e.g. Low dissipation, Low self inductance and E.S.R.

Wrapped in polyester tape, end filled with epoxy resin.

These capacitors are specially designed for AC or DC voltages.

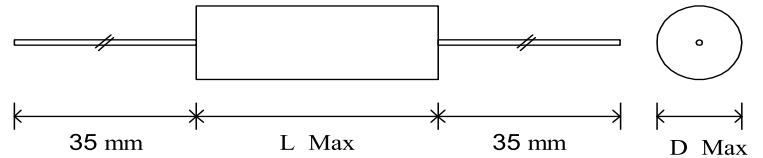

SPECIFICATION

Capacitance Range	100nF - 1uF
Capacitance Tolerance	± 5%
Rated Voltage	500 V AC / 1000 V DC
Dissipation Factor	<0.001 @ 1kHz
Pulse Rating	1uF and 0.22 uF 70v/Ohms 0.47uF and 1uF 40v/Ohms
Terminations	0.8 Tinned Copper Wire
Approvals	BS, EN, ISO 9001-2008

Capacitance	Length mm	Diameter mm
100 nF	28.0	12.0
220 nF	28.0	18.0
470 nF	45.0	19.0
1 uF	45.0	26.0